



Kokouno Ceiling

Ceiling H 25 cm

Studio PLS Design

colors



Typology Ceiling

Utilisation Indoor

230V 8.9 W 1120 lm




direct light

Single module of the Koko lamp with direct light. Painted aluminum tubular structure in different finishing. LED light source, electronic driver integrated in the body lamp. Available in two lengths.



Family Kokouno Ceiling
 Typology Ceiling
 Utilisation Indoor

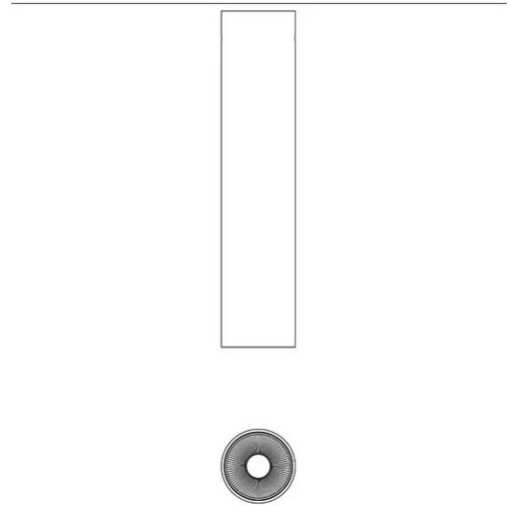

Dimensions


Lunghezza 25 cm
 Diameter 5,5 cm
 Weight 1 Kg

Materials


Structure aluminium Diffuser polycarbonate

Voltage	230V	Watt	8.9 W
Power unit		Lumen	1120 lm
Mounting Power Supply	Indoor	CRI	>80
Power supply	Electronic power supply	Duration	50000 h
Dimming	No dimmable	CCT	3000 K
		Energy class	E


Certifications

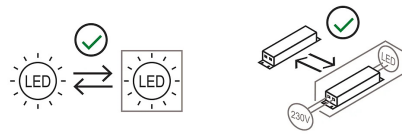

Photometric curves

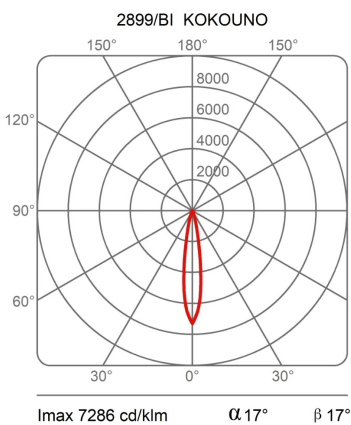

h (m)	Ø	Em (lux)
h1	0.3/0.3	2591
h2	0.6/0.6	648
h3	0.9/0.9	288
h4	1.2/1.2	162
h5	1.5/1.5	104

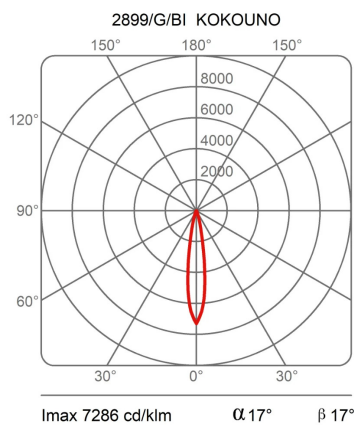

h (m)	Ø	Em (lux)
h1	0.3/0.3	2591
h2	0.6/0.6	648
h3	0.9/0.9	288
h4	1.2/1.2	162
h5	1.5/1.5	104



Colour variant code

2899/BI



White

2899/NE



Black

2899/BZ



Bronze

2899/AU



Pearl Gold



Gallery

