



# Sistema U

Narrow beam - length 10 cm

Studio Natural

colors



Typology Spotlight Ceiling

Utilisation Indoor

230V 13 W 1950 lm



Direct-light spotlight that can be oriented thanks to a special adjustable joint. Painted aluminium structure. LED light source with different light beams optics.

Integrated driver (cod. 1452)


Remote driver (cod. 1452/J)

Award





Family Sistema U  
 Typology Spotlight Ceiling  
 Utilisation Indoor

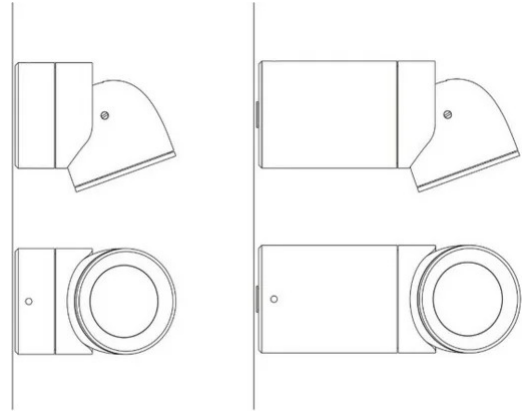

**Dimensions**

Profondità 10 cm  
 Diameter 7 cm  
 Weight 0.5 Kg

**Materials**


Structure aluminium Diffuser polycarbonate

Voltage	230V	Watt	13 W
Power unit	Excluded	Lumen	1950 lm
Mounting Power Supply	External	CRI	>80
Power supply	Electronic power supply	Duration	50000 h
Non dimmable		CCT	3000 K
		Energy class	D


**Certifications**



**EcoLabel**

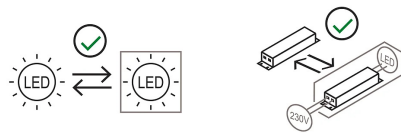


**Photometric curves**

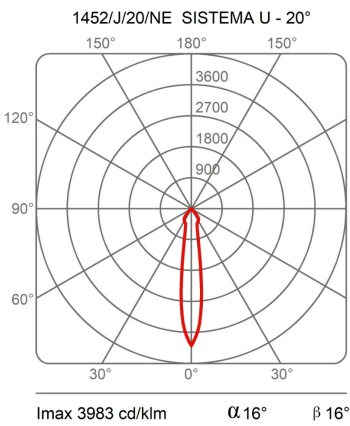

13W 3000K LED

h (m)	Ø	Em (lux)
h1	0.3/0.3	3414
h2	0.6/0.6	853
h3	0.9/0.9	379
h4	1.2/1.2	213
h5	1.4/1.4	137

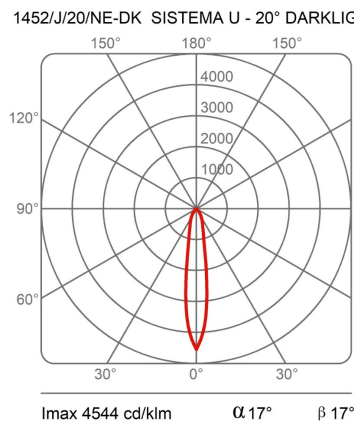

1452/J/20/NE-DK SISTEMA U - 20° DARKLIGHT13W 3000K LED

h (m)	Ø	Em (lux)
h1	0.3/0.3	1917
h2	0.6/0.6	479
h3	0.9/0.9	213
h4	1.2/1.2	120
h5	1.5/1.5	77

Colour variant code



1452/J/20/NE



Black



1452/J/20/BI



White



Accessories



40165  
Remote driver



40087  
Honey Comb Sistema U

---