

Kokouno Wall

H 50 cm

Studio PLS Design

colors



Typology Wall
Utilisation Indoor

230V 8.9 W 1120 lm + 8.9 W 1120 lm



direct light



indirect light


Single module of the Koko lamp with direct light. Painted aluminum tubular structure in different finishing.
LED light source, electronic driver integrated in the body lamp.
Available in two lengths.



Family	Kokouno Wall
Typology	Wall
Utilisation	Indoor

Dimensions

Profondità	9 cm
Lunghezza	50 cm
Diameter	5,5 cm
Weight	1,3 Kg


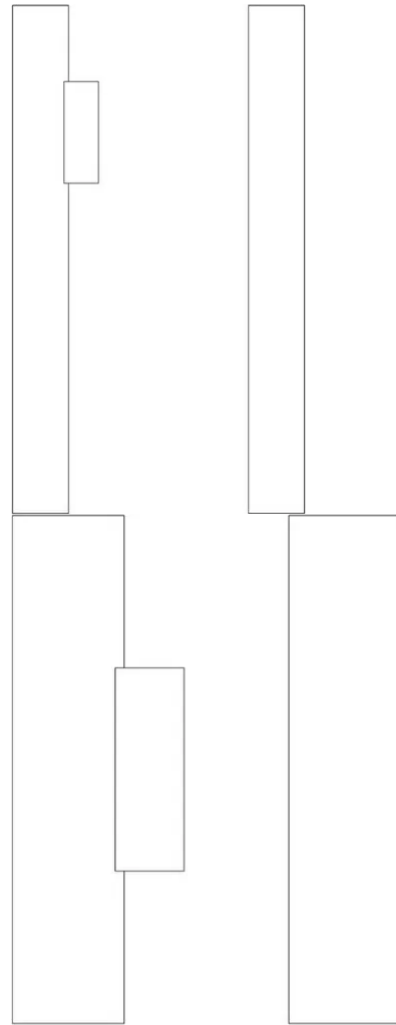


Materials


Structure	aluminium	Diffuser	polycarbonate
Base	aluminium		

Voltage	230V	Watt	8.9 W	Watt	8.9 W
Power unit		Lumen	1120 lm	Lumen	1120 lm
Mounting Power Supply	Indoor	CRI	>80	CRI	>80
Power supply	Electronic power supply	Duration	50000 h	Duration	50000 h
Dimming	No dimmable	CCT	3000 K	CCT	3000 K
		Energy class	E	Energy class	E

Certifications



Photometric curves

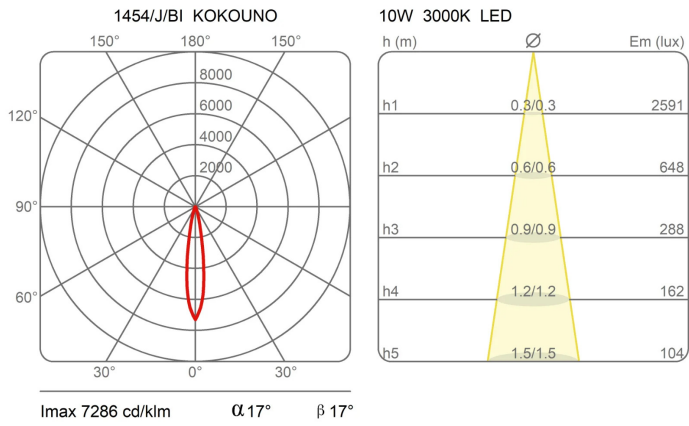

Colour variant code

1454/BI



White

1454/NE



Black

1454/BZ



Bronze

1454/AU



Pearl Gold